

Defensive Barriers  
Recoverable MIL Units



As the most significant development in field fortification since the Second World War, HESCO® MIL™ units have become a key component and a benchmark in force protection throughout the world.

Now, 22 years on, the recoverable MIL unit has been developed in direct response to two increasingly important factors: the military's increased commitment to environmental responsibility, and the rising costs of recovery of material both during and at the end of the mission. The result is MIL units are now also available in recoverable format.


Recoverable MIL units are deployed in exactly the same way as the standard MIL products. Once the mission is over, efficient recovery for disposal can begin. The units can be recovered, flat-packed and transported for recycling or disposal, providing substantial reduction in logistical and environmental impact.

The patented recoverable feature means that individual cells can be opened by removing just one pin, allowing the fill material to be released from the unit.

The twisted ball of wire and geotextile that results when removing a unit using traditional demolition techniques can be 12 times the optimum volume of the same unit when it is flat-packed, packaged and delivered. Recoverable units can be removed occupying only twice the original volume of the new, delivered unit.

For more information about Hesco's products and recoverable MIL units, contact us direct or visit our website at: [www.hesco.com](http://www.hesco.com)

The product featured in this publication comes with a 2 year warranty, subject to Hesco's terms and conditions.

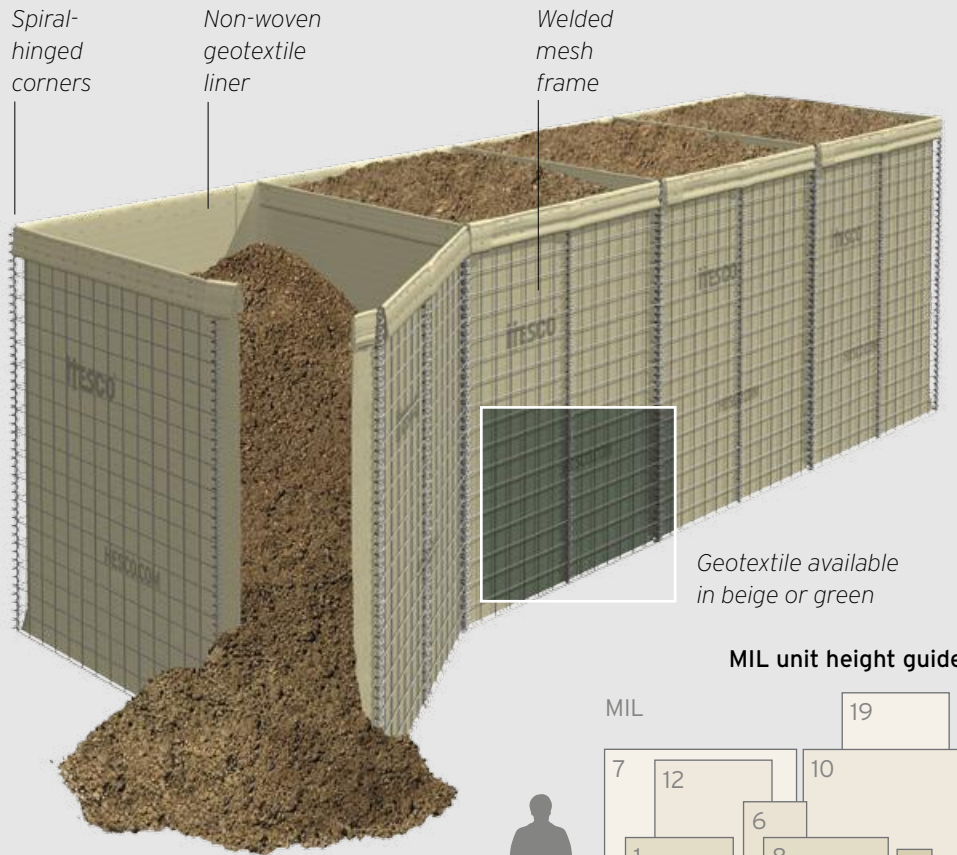

Defensive Barriers			
Product	Height	Width	Length
<i>Recoverable</i>			
MIL1 5442 R*	54" (1.37m)	42" (1.06m)	32'9" (10m)
MIL2 2424 R	24" (0.61m)	24" (0.61m)	4' (1.22m)
MIL3 3939 R	39" (1.00m)	39" (1.00m)	32'9" (10m)
MIL4 3960 R	39" (1.00m)	60" (1.52m)	32'9" (10m)
MIL5 2424 R	24" (0.61m)	24" (0.61m)	10' (3.05m)
MIL6 6624 R	66" (1.68m)	24" (0.61m)	10' (3.05m)
MIL7 8784 R	87" (2.21m)	84" (2.13m)	91' (27.74m)
MIL8 5448 R	54" (1.37m)	48" (1.22m)	32'9" (10m)
MIL9 3930 R	39" (1.00m)	30" (0.76m)	30' (9.14m)
MIL10 8760 R	87" (2.21m)	60" (1.52m)	100' (30.50m)
MIL11 4812 R	48" (1.22m)	12" (0.30m)	4' (1.22m)
MIL12 8442 R	84" (2.13m)	42" (1.06m)	108' (33m)

\* Shown above.

All HESCO® products have a typical design life of up to 5 years depending on atmospheric environment.



[www.hesco.com](http://www.hesco.com)

Hesco Bastion Ltd, Unit 41, Knowsthorpe Way, Cross Green Ind. Est., Leeds, LS9 0SW, United Kingdom  
Telephone: +44 113 248 6633  
Email: [info@hesco.com](mailto:info@hesco.com)

**US and Americas Inquiries**  
Hesco Bastion, Inc., 2821 Azalea Drive, Charleston, SC 29405, United States  
Telephone: +1 843-637-3409  
Email: [hbi@hesco.com](mailto:hbi@hesco.com)

**Disclaimer**

The information contained in this publication is intended solely to provide general guidance. The right is reserved to make changes to this publication without notice at any time. Nothing in this publication (i) constitutes an offer, representation, warranty, term or condition or (ii) is a substitute for the need to employ adequate independent technical expertise and judgment.

This material is subject to copyright protection.

**Patents and Trademarks**

HESCO® products are subject to patents and/or patent applications in territories around the world. HESCO® is a registered trademark of Hesco Bastion Ltd and its affiliates ("Hesco") around the world. Other trademarks also apply.

For full details, please go to: [www.hesco.com/legal\\_notice](http://www.hesco.com/legal_notice)

**Quality Standards**

Hesco operates a quality management system approved and certified to ISO 9001:2008