

Defensive Barriers Technical Specification Sheet

MIL1 5442 R Unit



HESCO.COM

Unit	Height	Width	Length	NSN
MIL1 5442 R (Beige)	4'6" 1.37m	3'6" 1.06m	32'9" 10m	5680-99-835-7866
MIL1 5442 R (Green)	4'6" 1.37m	3'6" 1.06m	32'9" 10m	5680-99-001-9396




A geotextile-lined recoverable unit for general use as an earth-filled barrier. The units are suitable for filling with earth, sand, gravel, crushed rock and other granular materials. The unit fulfills a wide range of uses, including the construction of protective walls and barriers.

General specifications

Geotextile-lined welded mesh barrier coated to ASTM A 856. All wires conform to BS EN 10218-2:2012. Zinc-Aluminum coatings are to BS EN 10244-2:2009, where appropriate. The geotextile is a heavy-duty, non-woven, permeable, polypropylene fabric, available in either beige or green color.

All dimensions and weights are nominal. Diagrams and product images are for illustrative purposes only.

HESCO.COM

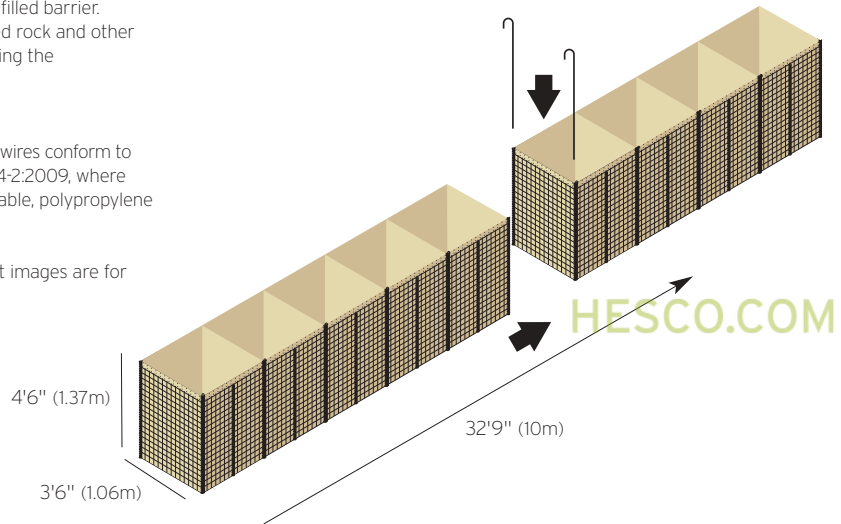

HESCO.COM

HESCO.COM

Flat-packed individual unit dimensions & weights

Height	Width	Length	Weight
11" 0.26m	3'10" 1.17m	4'6" 1.37m	344lb 156kg

Pallet information

Units per pallet	Height	Width	Length	Weight
7	7'2" 2.20m	3'10" 1.17m	4'8" 1.43m	2454lb 1113kg

Transport information

Transport Type	Pallets	Units	Deployed Length
13.5m Trailer	18	126	4133' 1260m
20' Container	8	56	1837' 560m
40' Container	16	112	3674' 1120m

UK and Rest of World Inquiries
HESCO Bastion Ltd, Unit 41,
Knowsthorpe Way, Cross Green Ind. Est.,
Leeds, LS9 0SW, United Kingdom
Telephone: +44 113 248 6633
Email: info@hesco.com

US and Americas Inquiries
HESCO Bastion, Inc., 2821 Azalea Drive,
Charleston, SC 29405, United States
Telephone: +1 843-637-3409
Email: hbi@hesco.com

Disclaimer
The information contained in this document is intended solely to provide general guidance. The right is reserved to make changes to this document without notice at any time. Nothing in this document (i) constitutes an offer, representation, warranty, term or condition or (ii) is a substitute for the need to employ adequate independent technical expertise and judgment.

This material is subject to copyright protection.

Patents and Trademarks
HESCO products are subject to patents and/or patent applications in territories around the world. HESCO is a registered trademark of HESCO Bastion Ltd and its affiliates ("HESCO") around the world. Other trademarks also apply.

For full details, please go to:
www.hesco.com/legal_notice

Quality Standards
HESCO operates a quality management system certified to ISO 9001:2008.
Approved Certificate Number:
LRQ 0910654

Copyright © 2012 - 2013 HESCO.
All rights reserved.

Defensive Barriers Technical Specification Sheet

MIL2 2424 R Unit



HESCO.COM

Unit	Height	Width	Length	NSN
MIL2 2424 R (Beige)	2' 0.61m	2' 0.61m	4' 1.22m	5680-99-968-1764
MIL2 2424 R (Green)	2' 0.61m	2' 0.61m	4' 1.22m	5680-99-001-9397




A geotextile-lined recoverable unit for general use as an earth-filled barrier. The units are suitable for filling with earth, sand, gravel, crushed rock and other granular materials. The unit fulfills a wide range of uses, including the construction of protective walls and barriers.


General specifications

Geotextile-lined welded mesh barrier coated to ASTM A 856. All wires conform to BS EN 10218-2:2012. Zinc-Aluminum coatings are to BS EN 10244-2:2009, where appropriate. The geotextile is a heavy-duty, non-woven, permeable, polypropylene fabric, available in either beige or green color.

All dimensions and weights are nominal. Diagrams and product images are for illustrative purposes only.

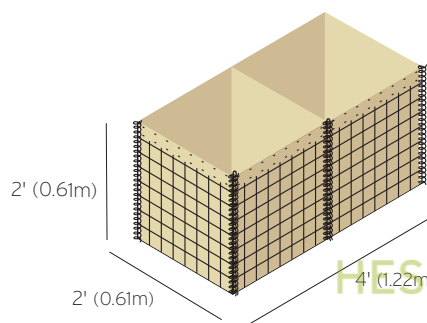

HESCO.COM

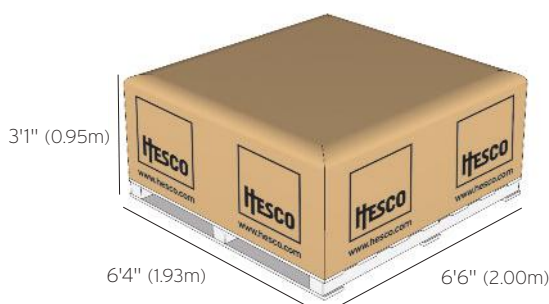

HESCO.COM

Flat-packed individual unit dimensions & weights

Height	Width	Length	Weight
3" 0.08m	2'3" 0.68m	2' 0.61m	24lb 11kg

Pallet information

Units per pallet	Height	Width	Length	Weight
120	3'1" 0.95m	6'4" 1.93m	6'6" 2.00m	3018lb 1369kg

Transport information

Transport Type	Pallets	Units	Deployed Length
13.5m Trailer	18	2160	8645' 2635m
20' Container	6	720	2881' 878m
40' Container	12	1440	5763' 1756m

UK and Rest of World Inquiries
HESCO Bastion Ltd, Unit 41,
Knowsthorpe Way, Cross Green Ind. Est.,
Leeds, LS9 0SW, United Kingdom
Telephone: +44 113 248 6633
Email: info@hesco.com

US and Americas Inquiries
HESCO Bastion, Inc., 2821 Azalea Drive,
Charleston, SC 29405, United States
Telephone: +1 843-637-3409
Email: hbi@hesco.com

Disclaimer
The information contained in this document is intended solely to provide general guidance. The right is reserved to make changes to this document without notice at any time. Nothing in this document (i) constitutes an offer, representation, warranty, term or condition or (ii) is a substitute for the need to employ adequate independent technical expertise and judgment.

This material is subject to copyright protection.

Patents and Trademarks
HESCO products are subject to patents and/or patent applications in territories around the world. HESCO is a registered trademark of HESCO Bastion Ltd and its affiliates ("HESCO") around the world. Other trademarks also apply.

For full details, please go to:
www.hesco.com/legal_notice

Quality Standards
HESCO operates a quality management system certified to ISO 9001:2008. Approved Certificate Number: LRQ 0910654

Copyright © 2012 - 2013 HESCO.
All rights reserved.


Defensive Barriers Technical Specification Sheet

MIL3 3939 R Unit



HESCO.COM

Unit	Height	Width	Length	NSN
MIL3 3939 R (Beige)	3'3" 1.00m	3'3" 1.00m	32'9" 10m	5680-99-001-9392
MIL3 3939 R (Green)	3'3" 1.00m	3'3" 1.00m	32'9" 10m	5680-99-001-9398




A geotextile-lined recoverable unit for general use as an earth-filled barrier. The units are suitable for filling with earth, sand, gravel, crushed rock and other granular materials. The unit fulfills a wide range of uses, including the construction of protective walls and barriers.

General specifications

Geotextile-lined welded mesh barrier coated to ASTM A 856. All wires conform to BS EN 10218-2:2012. Zinc-Aluminum coatings are to BS EN 10244-2:2009, where appropriate. The geotextile is a heavy-duty, non-woven, permeable, polypropylene fabric, available in either beige or green color.

All dimensions and weights are nominal. Diagrams and product images are for illustrative purposes only.

HESCO.COM

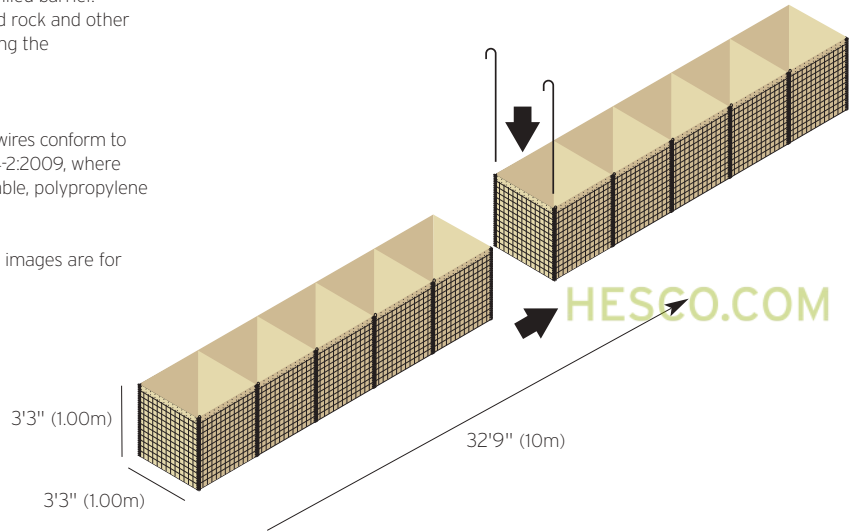

HESCO.COM

HESCO.COM

Flat-packed individual unit dimensions & weights

Height	Width	Length	Weight
9" 0.21m	3'9" 1.14m	3'3" 1.00m	247lb 112kg

Pallet information

Units per pallet	Height	Width	Length	Weight
8	5'9" 1.75m	3'7" 1.10m	3'11" 1.19m	2083lb 945kg

Transport information

Transport Type	Pallets	Units	Deployed Length
13.5m Trailer	22	176	5774' 1760m
20' Container	10	80	2624' 800m
40' Container	20	160	5249' 1600m

UK and Rest of World Inquiries
HESCO Bastion Ltd, Unit 41,
Knowsthorpe Way, Cross Green Ind. Est.,
Leeds, LS9 0SW, United Kingdom
Telephone: +44 113 248 6633
Email: info@hesco.com

US and Americas Inquiries
HESCO Bastion, Inc., 2821 Azalea Drive,
Charleston, SC 29405, United States
Telephone: +1 843-637-3409
Email: hbi@hesco.com

Disclaimer
The information contained in this document is intended solely to provide general guidance. The right is reserved to make changes to this document without notice at any time. Nothing in this document (i) constitutes an offer, representation, warranty, term or condition or (ii) is a substitute for the need to employ adequate independent technical expertise and judgment.

This material is subject to copyright protection.

Patents and Trademarks
HESCO products are subject to patents and/or patent applications in territories around the world. HESCO is a registered trademark of HESCO Bastion Ltd and its affiliates ("HESCO") around the world. Other trademarks also apply.

For full details, please go to:
www.hesco.com/legal_notice

Quality Standards
HESCO operates a quality management system certified to ISO 9001:2008. Approved Certificate Number: LRQ 0910654

HESCO.COM

Copyright © 2012 - 2013 HESCO.
All rights reserved.

Defensive Barriers Technical Specification Sheet

MIL4 3960 R Unit



HESCO.COM

Unit	Height	Width	Length	NSN
MIL4 3960 R (Beige)	3'3" 1.00m	5' 1.52m	32'9" 10m	5680-99-001-9393
MIL4 3960 R (Green)	3'3" 1.00m	5' 1.52m	32'9" 10m	5680-99-001-9399




A geotextile-lined recoverable unit for general use as an earth-filled barrier. The units are suitable for filling with earth, sand, gravel, crushed rock and other granular materials. The unit fulfills a wide range of uses, including the construction of protective walls and barriers.

General specifications

Geotextile-lined welded mesh barrier coated to ASTM A 856. All wires conform to BS EN 10218-2:2012. Zinc-Aluminum coatings are to BS EN 10244-2:2009, where appropriate. The geotextile is a heavy-duty, non-woven, permeable, polypropylene fabric, available in either beige or green color.

All dimensions and weights are nominal. Diagrams and product images are for illustrative purposes only.

HESCO.COM

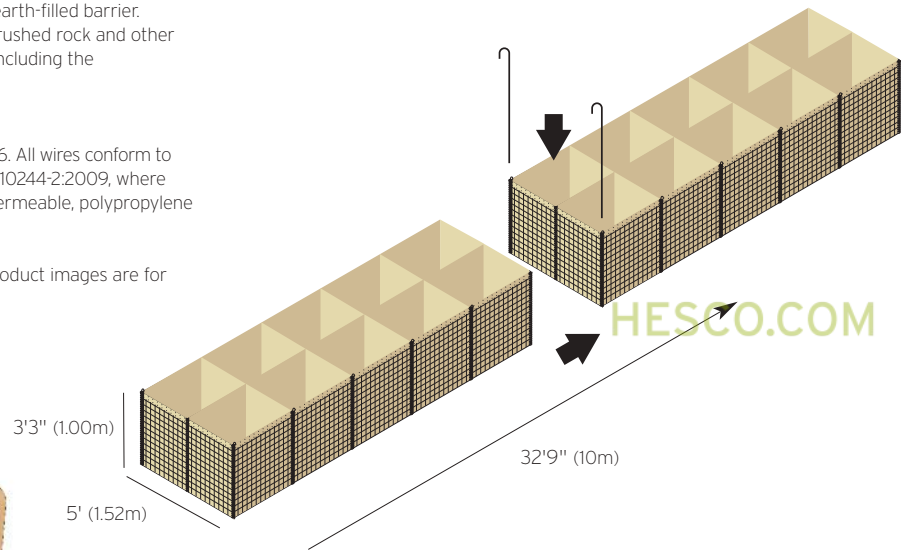

HESCO.COM

HESCO.COM

Flat-packed individual unit dimensions & weights

Height	Width	Length	Weight
1'4" 0.40m	5'3" 1.60m	3'3" 1.00m	392lb 178kg

Pallet information

Units per pallet	Height	Width	Length	Weight
8	6'5" 1.96m	3'7" 1.10m	8'9" 2.67m	3183lb 1444kg

Transport information

Transport Type	Pallets	Units	Deployed Length
13.5m Trailer	10	80	2624' 800m
20' Container	4	32	1050' 320m
40' Container	8	64	2100' 640m

UK and Rest of World Inquiries
HESCO Bastion Ltd, Unit 41,
Knowsthorpe Way, Cross Green Ind. Est.,
Leeds, LS9 0SW, United Kingdom
Telephone: +44 113 248 6633
Email: info@hesco.com

US and Americas Inquiries
HESCO Bastion, Inc., 2821 Azalea Drive,
Charleston, SC 29405, United States
Telephone: +1 843-637-3409
Email: hbi@hesco.com

Disclaimer
The information contained in this document is intended solely to provide general guidance. The right is reserved to make changes to this document without notice at any time. Nothing in this document (i) constitutes an offer, representation, warranty, term or condition or (ii) is a substitute for the need to employ adequate independent technical expertise and judgment.

This material is subject to copyright protection.

Patents and Trademarks
HESCO products are subject to patents and/or patent applications in territories around the world. HESCO is a registered trademark of HESCO Bastion Ltd and its affiliates ("HESCO") around the world. Other trademarks also apply.

For full details, please go to:
www.hesco.com/legal_notice

Quality Standards
HESCO operates a quality management system certified to ISO 9001:2008.
Approved Certificate Number:
LRQ 0910654

Copyright © 2012 - 2013 HESCO.
All rights reserved.

Defensive Barriers Technical Specification Sheet

MIL5 2424 R Unit



HESCO.COM

Unit	Height	Width	Length	NSN
MIL5 2424 R (Beige)	2' 0.61m	2' 0.61m	10' 3.05m	5680-99-001-9394
MIL5 2424 R (Green)	2' 0.61m	2' 0.61m	10' 3.05m	5680-99-001-9400




A geotextile-lined recoverable unit for general use as an earth-filled barrier. The units are suitable for filling with earth, sand, gravel, crushed rock and other granular materials. The unit fulfills a wide range of uses, including the construction of protective walls and barriers.

General specifications

Geotextile-lined welded mesh barrier coated to ASTM A 856. All wires conform to BS EN 10218-2:2012. Zinc-Aluminum coatings are to BS EN 10244-2:2009, where appropriate. The geotextile is a heavy-duty, non-woven, permeable, polypropylene fabric, available in either beige or green color.

All dimensions and weights are nominal. Diagrams and product images are for illustrative purposes only.

HESCO.COM

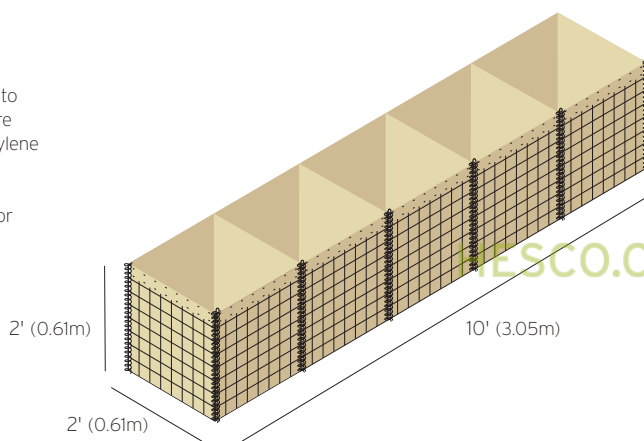

HESCO.COM

HESCO.COM

Flat-packed individual unit dimensions & weights

Height	Width	Length	Weight
5" 0.13m	2'7" 0.79m	2' 0.61m	53lb 24kg

Pallet information

Units per pallet	Height	Width	Length	Weight
50	3' 0.91m	6'4" 1.93m	7'4" 2.24m	2745lb 1245kg

Transport information

Transport Type	Pallets	Units	Deployed Length
13.5m Trailer	18	900	9006' 2745m
20' Container	6	300	3000' 915m
40' Container	12	600	6003' 1830m

UK and Rest of World Inquiries
HESCO Bastion Ltd, Unit 41,
Knowsthorpe Way, Cross Green Ind. Est.,
Leeds, LS9 0SW, United Kingdom
Telephone: +44 113 248 6633
Email: info@hesco.com

US and Americas Inquiries
HESCO Bastion, Inc., 2821 Azalea Drive,
Charleston, SC 29405, United States
Telephone: +1 843-637-3409
Email: hbi@hesco.com

Disclaimer
The information contained in this document is intended solely to provide general guidance. The right is reserved to make changes to this document without notice at any time. Nothing in this document (i) constitutes an offer, representation, warranty, term or condition or (ii) is a substitute for the need to employ adequate independent technical expertise and judgment.

This material is subject to copyright protection.

Patents and Trademarks
HESCO products are subject to patents and/or patent applications in territories around the world. HESCO is a registered trademark of HESCO Bastion Ltd and its affiliates ("HESCO") around the world. Other trademarks also apply.

For full details, please go to:
www.hesco.com/legal_notice

Quality Standards
HESCO operates a quality management system certified to ISO 9001:2008.
Approved Certificate Number:
LRQ 0910654

Copyright © 2012 - 2013 HESCO.
All rights reserved.

Defensive Barriers Technical Specification Sheet

MIL6 6624 R Unit



HESCO.COM

Unit	Height	Width	Length	NSN
MIL6 6624 R (Beige)	5'6" 1.68m	2' 0.61m	10' 3.05m	5680-99-0019395
MIL6 6624 R (Green)	5'6" 1.68m	2' 0.61m	10' 3.05m	5680-99-001-9401




A geotextile-lined recoverable unit for general use as an earth-filled barrier. The units are suitable for filling with earth, sand, gravel, crushed rock and other granular materials. The unit fulfills a wide range of uses, including the construction of protective walls, barriers and compartmentalisation.

General specifications

Geotextile-lined welded mesh barrier coated to ASTM A 856. All wires conform to BS EN 10218-2:2012. Zinc-Aluminum coatings are to BS EN 10244-2:2009, where appropriate. The geotextile is a heavy-duty, non-woven, permeable, polypropylene fabric, available in either beige or green color.

All dimensions and weights are nominal. Diagrams and product images are for illustrative purposes only.

HESCO.COM

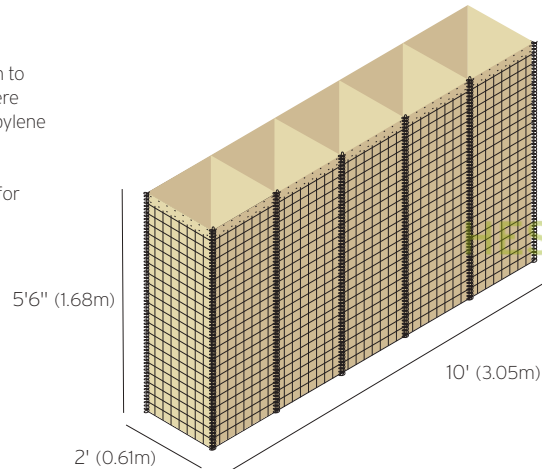

HESCO.COM

HESCO.COM

Flat-packed individual unit dimensions & weights

Height	Width	Length	Weight
9" 0.23m	2' 0.61m	5'6" 1.68m	146lb 66kg

Pallet information

Units per pallet	Height	Width	Length	Weight
27	4'11" 1.25m	5'9" 1.75m	7'5" 2.25m	4023lb 1825kg

Transport information

Transport Type	Pallets	Units	Deployed Length
13.5m Trailer	18	486	4863' 1482m
20' Container	6	162	1621' 494m
40' Container	12	324	3242' 988m

UK and Rest of World Inquiries
HESCO Bastion Ltd, Unit 41,
Knowsthorpe Way, Cross Green Ind. Est.,
Leeds, LS9 0SW, United Kingdom
Telephone: +44 113 248 6633
Email: info@hesco.com

US and Americas Inquiries
HESCO Bastion, Inc., 2821 Azalea Drive,
Charleston, SC 29405, United States
Telephone: +1 843-637-3409
Email: hbi@hesco.com

Disclaimer
The information contained in this document is intended solely to provide general guidance. The right is reserved to make changes to this document without notice at any time. Nothing in this document (i) constitutes an offer, representation, warranty, term or condition or (ii) is a substitute for the need to employ adequate independent technical expertise and judgment.

This material is subject to copyright protection.

Patents and Trademarks
HESCO products are subject to patents and/or patent applications in territories around the world. HESCO is a registered trademark of HESCO Bastion Ltd and its affiliates ("HESCO") around the world. Other trademarks also apply.

For full details, please go to:
www.hesco.com/legal_notice

Quality Standards
HESCO operates a quality management system certified to ISO 9001:2008.
Approved Certificate Number:
LRQ 0910654

Copyright © 2012 - 2013 HESCO.
All rights reserved.

Defensive Barriers Technical Specification Sheet

MIL7 8784 R Unit



HESCO.COM

Unit	Height	Width	Length	NSN
MIL7 8784 R (Beige)	7'3" 2.21m	7' 2.13m	91' 27.74m	5680-99-169-0183
MIL7 8784 R (Green)	7'3" 2.21m	7' 2.13m	91' 27.74m	5680-99-126-3716



A geotextile-lined recoverable unit for general use as an earth-filled barrier. The units are suitable for filling with earth, sand, gravel, crushed rock and other granular materials. The unit fulfills a wide range of uses, including the construction of protective walls and barriers.


General specifications

Geotextile-lined welded mesh barrier coated to ASTM A 856. All wires conform to BS EN 10218-2:2012. Zinc-Aluminum coatings are to BS EN 10244-2:2009, where appropriate. The geotextile is a heavy-duty, non-woven, permeable, polypropylene fabric, available in either beige or green color.

All dimensions and weights are nominal. Diagrams and product images are for illustrative purposes only.

HESCO.COM

HESCO.COM

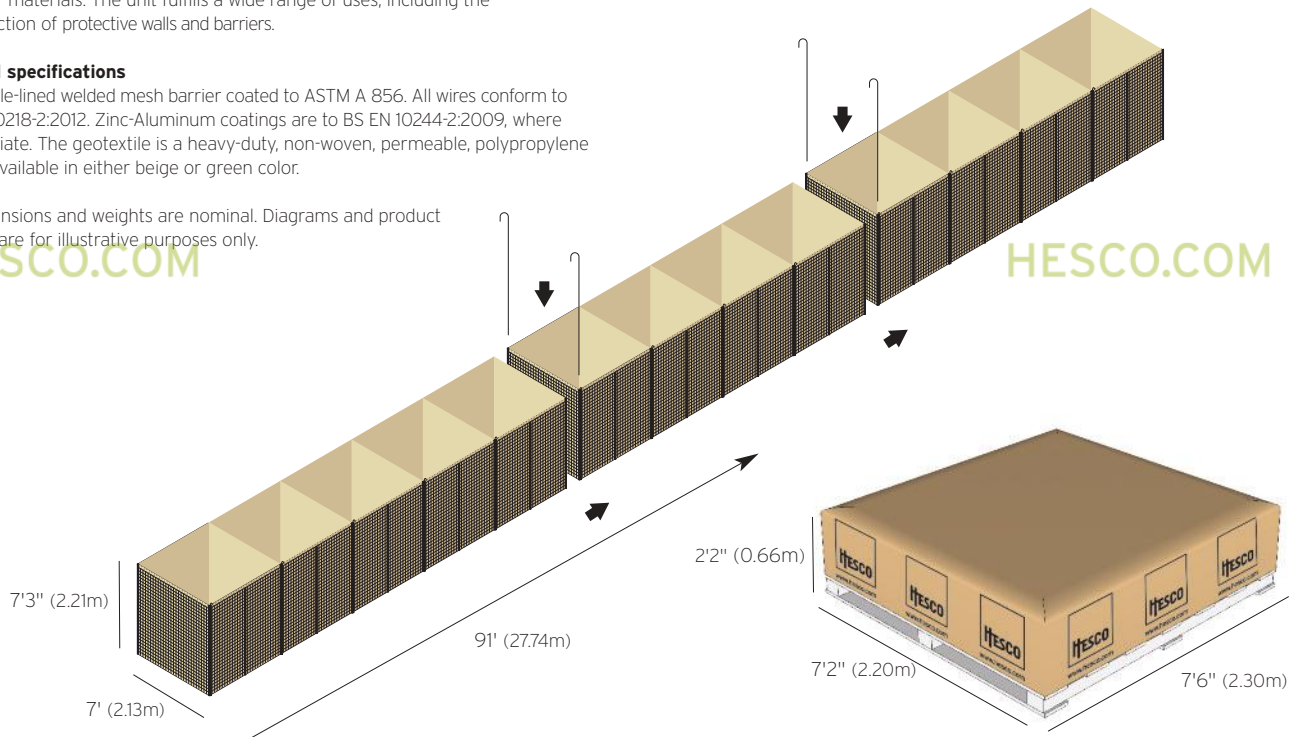

HESCO.COM

Flat-packed individual unit dimensions & weights

Height	Width	Length	Weight
1'7" 0.48m	7'4" 2.24m	7'3" 2.21m	2133lb 968kg

Pallet information

Units per pallet	Height	Width	Length	Weight
1	2'2" 0.66m	7'2" 2.20m	7'6" 2.30m	2233lb 1013kg

Transport information

Transport Type	Pallets	Units	Deployed Length
13.5m Trailer	20	20	1820' 555m
20' Container	6	6	546' 166m
40' Container	15	15	1365' 416m

UK and Rest of World Inquiries
HESCO Bastion Ltd, Unit 41,
Knowsthorpe Way, Cross Green Ind. Est.,
Leeds, LS9 0SW, United Kingdom
Telephone: +44 113 248 6633
Email: info@hesco.com

US and Americas Inquiries
HESCO Bastion, Inc., 2821 Azalea Drive,
Charleston, SC 29405, United States
Telephone: +1 843-637-3409
Email: hbi@hesco.com

Disclaimer
The information contained in this document is intended solely to provide general guidance. The right is reserved to make changes to this document without notice at any time. Nothing in this document (i) constitutes an offer, representation, warranty, term or condition or (ii) is a substitute for the need to employ adequate independent technical expertise and judgment.

This material is subject to copyright protection.

Patents and Trademarks
HESCO products are subject to patents and/or patent applications in territories around the world. HESCO is a registered trademark of HESCO Bastion Ltd and its affiliates ("HESCO") around the world. Other trademarks also apply.

For full details, please go to:
www.hesco.com/legal_notice

Quality Standards
HESCO operates a quality management system certified to ISO 9001:2008. Approved Certificate Number: LRQ 0910654

Copyright © 2012 - 2013 HESCO.
All rights reserved.

Defensive Barriers Technical Specification Sheet

MIL8 5448 R Unit



HESCO.COM

Unit	Height	Width	Length	NSN
MIL8 5448 R (Beige)	4'6" 1.37m	4' 1.22m	32'9" 10m	5680-99-335-4902
MIL8 5448 R (Green)	4'6" 1.37m	4' 1.22m	32'9" 10m	5680-99-517-3281



A geotextile-lined recoverable unit for general use as an earth-filled barrier. The units are suitable for filling with earth, sand, gravel, crushed rock and other granular materials. The unit fulfills a wide range of uses, including the construction of protective walls and barriers.

General specifications

Geotextile-lined welded mesh barrier coated to ASTM A 856. All wires conform to BS EN 10218-2:2012. Zinc-Aluminum coatings are to BS EN 10244-2:2009, where appropriate. The geotextile is a heavy-duty, non-woven, permeable, polypropylene fabric, available in either beige or green color.

All dimensions and weights are nominal. Diagrams and product images are for illustrative purposes only.

HESCO.COM

HESCO.COM



HESCO.COM

Flat-packed individual unit dimensions & weights

Height	Width	Length	Weight
11" 0.28m	4'3" 1.29m	4'6" 1.37m	351lb 160kg

Pallet information

Units per pallet	Height	Width	Length	Weight
4	5'1" 1.55m	3'10" 1.17m	4'6" 1.37m	1475lb 669kg

Transport information

Transport Type	Pallets	Units	Deployed Length
13.5m Trailer	18	72	2362' 720m
20' Container	8	32	1050' 320m
40' Container	18	72	2362' 720m

UK and Rest of World Inquiries
HESCO Bastion Ltd, Unit 41,
Knowsthorpe Way, Cross Green Ind. Est.,
Leeds, LS9 0SW, United Kingdom
Telephone: +44 113 248 6633
Email: info@hesco.com

US and Americas Inquiries
HESCO Bastion, Inc., 2821 Azalea Drive,
Charleston, SC 29405, United States
Telephone: +1 843-637-3409
Email: hbi@hesco.com

Disclaimer
The information contained in this document is intended solely to provide general guidance. The right is reserved to make changes to this document without notice at any time. Nothing in this document (i) constitutes an offer, representation, warranty, term or condition or (ii) is a substitute for the need to employ adequate independent technical expertise and judgment.

This material is subject to copyright protection.

Patents and Trademarks
HESCO products are subject to patents and/or patent applications in territories around the world. HESCO is a registered trademark of HESCO Bastion Ltd and its affiliates ("HESCO") around the world. Other trademarks also apply.

For full details, please go to:
www.hesco.com/legal_notice

Quality Standards
HESCO operates a quality management system certified to ISO 9001:2008. Approved Certificate Number: LRQ 0910654

Copyright © 2012 - 2013 HESCO.
All rights reserved.

Defensive Barriers Technical Specification Sheet

MIL9 3930 R Unit



HESCO.COM

Unit	Height	Width	Length	NSN
MIL9 3930 R (Beige)	3'3" 1.00m	2'6" 0.76m	30' 9.14m	5680-99-563-5949
MIL9 3930 R (Green)	3'3" 1.00m	2'6" 0.76m	30' 9.14m	5680-99-052-0506



A geotextile-lined recoverable unit for general use as an earth-filled barrier. The units are suitable for filling with earth, sand, gravel, crushed rock and other granular materials. The unit fulfills a wide range of uses, including the construction of protective walls and barriers.


General specifications

Geotextile-lined welded mesh barrier coated to ASTM A 856. All wires conform to BS EN 10218-2:2012. Zinc-Aluminum coatings are to BS EN 10244-2:2009, where appropriate. The geotextile is a heavy-duty, non-woven, permeable, polypropylene fabric, available in either beige or green color.

All dimensions and weights are nominal. Diagrams and product images are for illustrative purposes only.

HESCO.COM

HESCO.COM

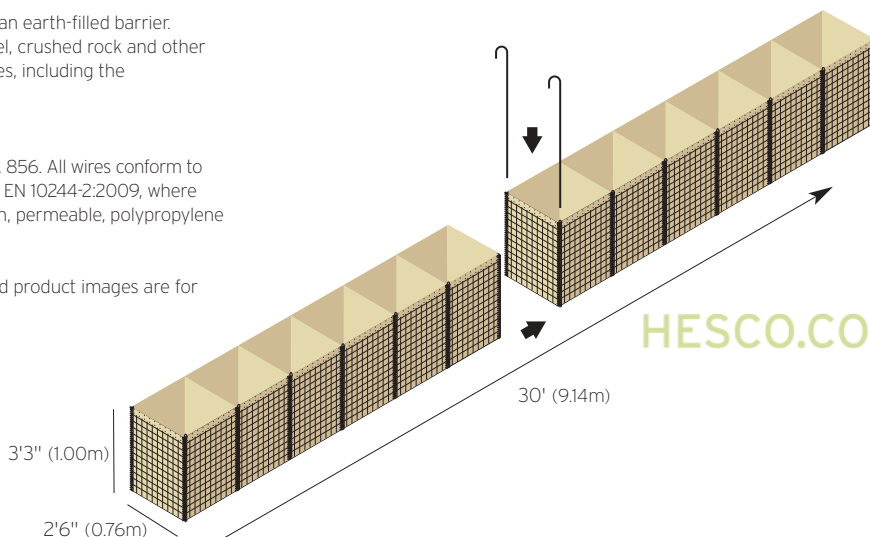

HESCO.COM

Flat-packed individual unit dimensions & weights

Height	Width	Length	Weight
1'1" 0.33m	3' 0.91m	3'3" 1.00m	238lb 108kg

Pallet information

Units per pallet	Height	Width	Length	Weight
7	6' 1.83m	3'7" 1.09m	3'3" 1.00m	1715lb 778kg

Transport information

Transport Type	Pallets	Units	Deployed Length
13.5m Trailer	24	168	5037' 1535m
20' Container	10	70	2100' 640m
40' Container	20	140	4198' 1280m

UK and Rest of World Inquiries
HESCO Bastion Ltd, Unit 41,
Knowsthorpe Way, Cross Green Ind. Est.,
Leeds, LS9 0SW, United Kingdom
Telephone: +44 113 248 6633
Email: info@hesco.com

US and Americas Inquiries
HESCO Bastion, Inc., 2821 Azalea Drive,
Charleston, SC 29405, United States
Telephone: +1 843-637-3409
Email: hbi@hesco.com

Disclaimer
The information contained in this document is intended solely to provide general guidance. The right is reserved to make changes to this document without notice at any time. Nothing in this document (i) constitutes an offer, representation, warranty, term or condition or (ii) is a substitute for the need to employ adequate independent technical expertise and judgment.

This material is subject to copyright protection.

Patents and Trademarks
HESCO products are subject to patents and/or patent applications in territories around the world. HESCO is a registered trademark of HESCO Bastion Ltd and its affiliates ("HESCO") around the world. Other trademarks also apply.

For full details, please go to:
www.hesco.com/legal_notice

Quality Standards
HESCO operates a quality management system certified to ISO 9001:2008. Approved Certificate Number: LRQ 0910654

Copyright © 2012 - 2013 HESCO.
All rights reserved.

Defensive Barriers Technical Specification Sheet

MIL10 8760 R Unit



HESCO.COM

Unit	Height	Width	Length	NSN
MIL10 8760 R (Beige)	7'3" 2.21m	5' 1.52m	100' 30.5m	5680-99-391-0852
MIL10 8760 R (Green)	7'3" 2.21m	5' 1.52m	100' 30.5m	5680-99-770-0326



A geotextile-lined recoverable unit for general use as an earth-filled barrier. The units are suitable for filling with earth, sand, gravel, crushed rock and other granular materials. The unit fulfills a wide range of uses, including the construction of protective walls and barriers.


General specifications

Geotextile-lined welded mesh barrier coated to ASTM A 856. All wires conform to BS EN 10218-2:2012. Zinc-Aluminum coatings are to BS EN 10244-2:2009, where appropriate. The geotextile is a heavy-duty, non-woven, permeable, polypropylene fabric, available in either beige or green color.

All dimensions and weights are nominal. Diagrams and product images are for illustrative purposes only.

HESCO.COM

HESCO.COM

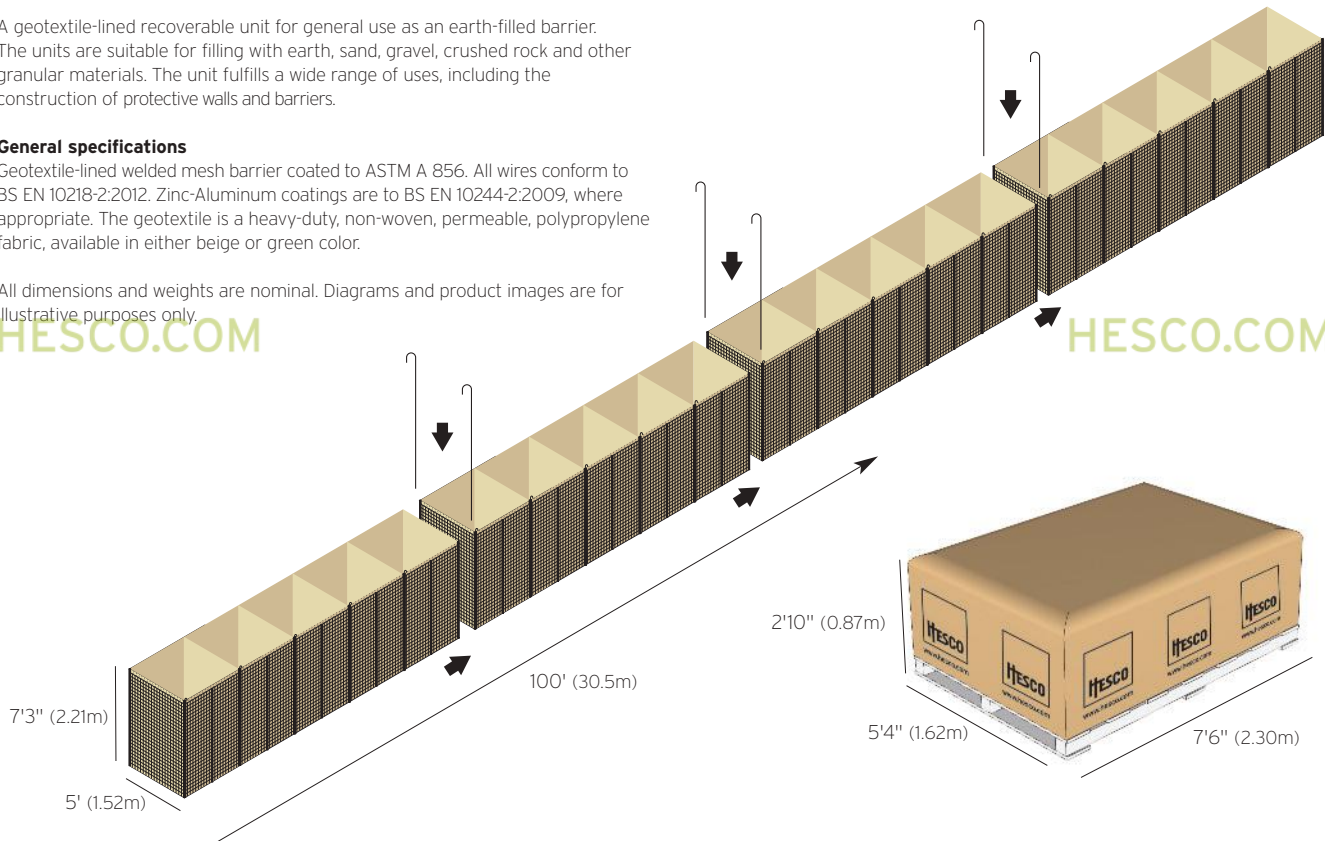

HESCO.COM

Flat-packed individual unit dimensions & weights

Height	Width	Length	Weight
2'4" 0.71m	5'5" 1.65m	7'4" 2.24m	2288lb 1040kg

Pallet information

Units per pallet	Height	Width	Length	Weight
1	2'10" 0.87m	5'4" 1.62m	7'6" 2.30m	2363lb 1074kg

Transport information

Transport Type	Pallets	Units	Deployed Length
13.5m Trailer	20	20	2000' 610m
20' Container	6	6	600' 183m
40' Container	14	14	1400' 427m

UK and Rest of World Inquiries
HESCO Bastion Ltd, Unit 41,
Knowsthorpe Way, Cross Green Ind. Est.,
Leeds, LS9 0SW, United Kingdom
Telephone: +44 (0)113 248 6633
Email: info@hesco.com

US and Americas Inquiries
HESCO Bastion, Inc., 2821 Azalea Drive,
Charleston, SC 29405, United States
Telephone: +1 843-637-3409
Email: hbi@hesco.com

Disclaimer
The information contained in this document is intended solely to provide general guidance. The right is reserved to make changes to this document without notice at any time. Nothing in this document (i) constitutes an offer, representation, warranty, term or condition or (ii) is a substitute for the need to employ adequate independent technical expertise and judgment.

This material is subject to copyright protection.

Patents and Trademarks
HESCO products are subject to patents and/or patent applications in territories around the world. HESCO is a registered trademark of HESCO Bastion Ltd and its affiliates ("HESCO") around the world. Other trademarks also apply.

For full details, please go to:
www.hesco.com/legal_notice

Quality Standards
HESCO operates a quality management system certified to ISO 9001:2008.
Approved Certificate Number:
LRQ 0910654

Copyright © 2012 - 2013 HESCO.
All rights reserved.

Defensive Barriers Technical Specification Sheet

MIL11 4812 R Unit



HESCO.COM

Unit	Height	Width	Length	NSN
MIL11 4812 R (Beige)	4' 1.22m	12" 0.30m	4' 1.22m	7195-99-867-9131
MIL11 4812 R (Green)	4' 1.22m	12" 0.30m	4' 1.22m	7195-99-668-0875




A geotextile-lined recoverable unit for general use as an earth-filled barrier. The units are suitable for filling with earth, sand, gravel, crushed rock and other granular materials. The unit fulfills a wide range of uses, including the construction of protective walls and barriers but specifically designed for compartmentalisation.

General specifications

Geotextile-lined welded mesh barrier coated to ASTM A 856. All wires conform to BS EN 10218-2:2012. Zinc-Aluminum coatings are to BS EN 10244-2:2009, where appropriate. The geotextile is a heavy-duty, non-woven, permeable, polypropylene fabric, available in either beige or green color.

All dimensions and weights are nominal. Diagrams and product images are for illustrative purposes only.

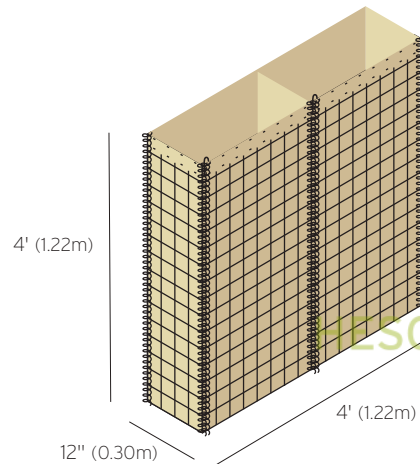

HESCO.COM

Flat-packed individual unit dimensions & weights

Height	Width	Length	Weight
3" 0.08m	2'11" 0.89m	4' 1.22m	35lb 16kg

Pallet information

Units per pallet	Height	Width	Length	Weight
60	6'4" 1.93m	4'3" 1.29m	3'10" 1.17m	2160lb 982kg

Transport information

Transport Type	Pallets	Units	Deployed Length
13.5m Trailer	18	1080	4323' 1317m
20' Container	8	480	1921' 586m
40' Container	16	960	3843' 1171m

UK and Rest of World Inquiries
HESCO Bastion Ltd, Unit 41,
Knowsthorpe Way, Cross Green Ind. Est.,
Leeds, LS9 0SW, United Kingdom
Telephone: +44 113 248 6633
Email: info@hesco.com

US and Americas Inquiries
HESCO Bastion, Inc., 2821 Azalea Drive,
Charleston, SC 29405, United States
Telephone: +1 843-637-3409
Email: hbi@hesco.com

Disclaimer
The information contained in this document is intended solely to provide general guidance. The right is reserved to make changes to this document without notice at any time. Nothing in this document (i) constitutes an offer, representation, warranty, term or condition or (ii) is a substitute for the need to employ adequate independent technical expertise and judgment.

This material is subject to copyright protection.

Patents and Trademarks
HESCO products are subject to patents and/or patent applications in territories around the world. HESCO is a registered trademark of HESCO Bastion Ltd and its affiliates ("HESCO") around the world. Other trademarks also apply.

For full details, please go to:
www.hesco.com/legal_notice

Quality Standards
HESCO operates a quality management system certified to ISO 9001:2008. Approved Certificate Number: LRQ 0910654

Copyright © 2012 - 2013 HESCO.
All rights reserved.

Defensive Barriers Technical Specification Sheet

MIL12 8442 R Unit



HESCO.COM

Unit	Height	Width	Length	NSN
MIL12 8442 R 7' (Beige)	2.13m	3'6" 1.06m	108' 33m	5680-99-974-8891
MIL12 8442 R 7' (Green)	2.13m	3'6" 1.06m	108' 33m	5680-99-153-1977


A geotextile-lined recoverable unit for general use as an earth-filled barrier. The units are suitable for filling with earth, sand, gravel, crushed rock and other granular materials. The unit fulfills a wide range of uses, including the construction of protective walls and barriers.

General specifications

Geotextile-lined welded mesh barrier coated to ASTM A 856. All wires conform to BS EN 10218-2:2012. Zinc-Aluminum coatings are to BS EN 10244-2:2009, where appropriate. The geotextile is a heavy-duty, non-woven, permeable, polypropylene fabric, available in either beige or green color.

All dimensions and weights are nominal. Diagrams and product images are for illustrative purposes only.

HESCO.COM

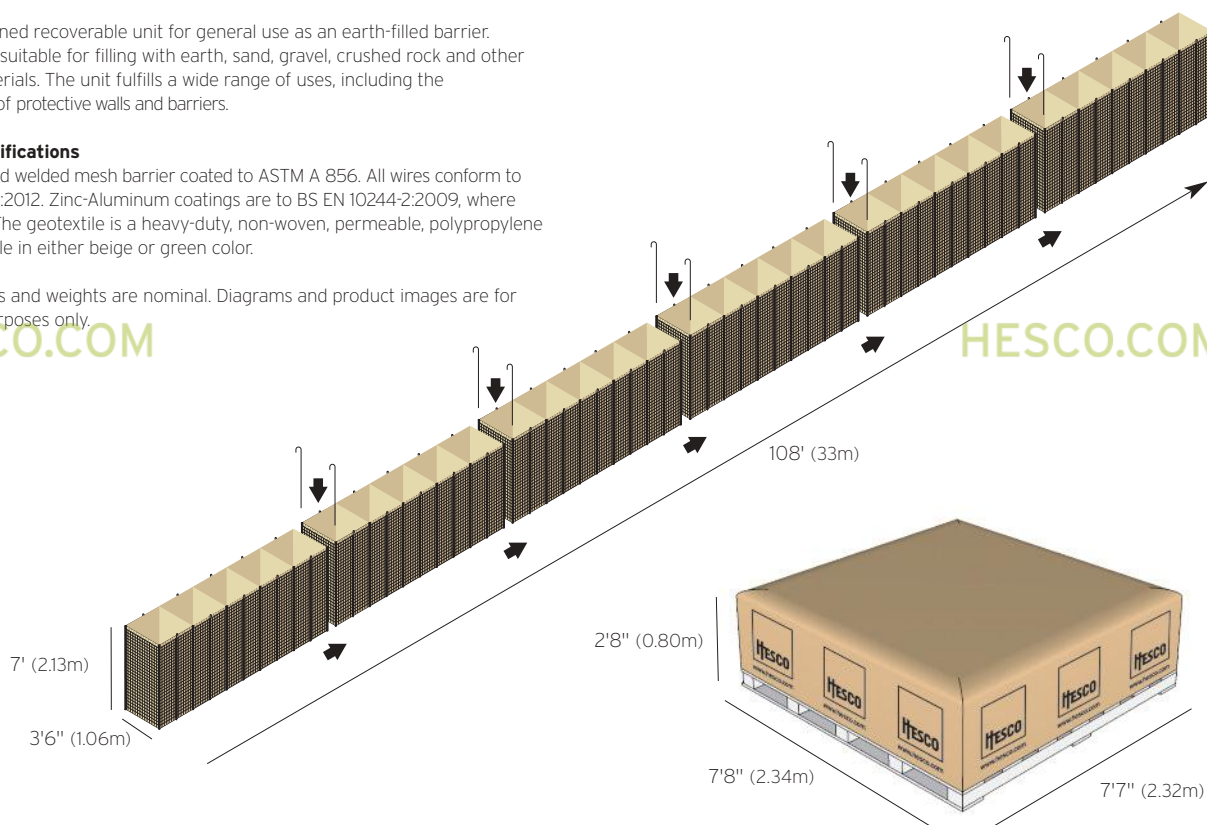

HESCO.COM

HESCO.COM

Flat-packed individual unit dimensions & weights

Height	Width	Length	Weight
2'1" 0.64m	7'8" 2.34m	7'7" 2.32m	1797lb 815kg

Pallet information

Units per pallet	Height	Width	Length	Weight
1	2'8" 0.80m	7'8" 2.34m	7'7" 2.32m	1898lb 861kg

Transport information

Transport Type	Pallets	Units	Deployed Length
13.5m Trailer	18	18	1948' 594m
20' Container	6	6	650' 198m
40' Container	15	15	1624' 495m

UK and Rest of World Inquiries
HESCO Bastion Ltd, Unit 41,
Knowsthorpe Way, Cross Green Ind. Est.,
Leeds, LS9 0SW, United Kingdom
Telephone: +44 113 248 6633
Email: info@hesco.com

US and Americas Inquiries
HESCO Bastion, Inc., 2821 Azalea Drive,
Charleston, SC 29405, United States
Telephone: +1 843-637-3409
Email: hbi@hesco.com

Disclaimer
The information contained in this document is intended solely to provide general guidance. The right is reserved to make changes to this document without notice at any time. Nothing in this document (i) constitutes an offer, representation, warranty, term or condition or (ii) is a substitute for the need to employ adequate independent technical expertise and judgment.

This material is subject to copyright protection.

Patents and Trademarks
HESCO products are subject to patents and/or patent applications in territories around the world. HESCO is a registered trademark of HESCO Bastion Ltd and its affiliates ("HESCO") around the world. Other trademarks also apply.

For full details, please go to:
www.hesco.com/legal_notice

Quality Standards
HESCO operates a quality management system certified to ISO 9001:2008. Approved Certificate Number: LRQ 0910654

Copyright © 2012 - 2013 HESCO.
All rights reserved.