

TECHNICAL SPECIFICATIONS

STORM BARRIERS

CART™ SL3942



UNIT	HEIGHT	WIDTH	LENGTH
CART SL3942	3'3" (1.00m)	3'6" (1.06m)	288' (88m)

CART™ is a revolutionary dispensing mechanism for the rapid deployment of HESCO® barriers. Once connected to a suitable towing vehicle, with the supplied strap, as much as 88m of product can be installed in as little as sixty seconds. The delivery system can deploy up to 80 cells of product in any combination of 5-cell segments.

A metal sled is available, which protects the front of the delivery pallet when impacts from large objects such as rocks are expected during deployment.

CART SL3942 dispenses a Storm Lined unit, using non-woven geotextile and is specifically designed for use as a flood unit in areas where floating debris damage may be an issue. The unit is suitable for filling with earth, sand, gravel, crushed rock and other granular materials. The unit fulfils a wide range of uses, including the construction of protective walls and flood-protection barriers.

GENERAL SPECIFICATIONS

Geotextile-lined welded mesh barrier coated to ASTM A 856. All wires conform to BS EN 10218-2:2012. Zinc-Aluminum coatings are to BS EN 10244-2:2009, where appropriate. The geotextile is a heavy-duty, non-woven, permeable, polypropylene fabric, available in either beige or green color. The provided strap should only be used once.

All dimensions and weights are nominal. Diagrams and product images are for illustrative purposes only.

PACKAGING AND TRANSPORT INFORMATION

PALLET INFORMATION





PER PACK	HEIGHT	WIDTH	LENGTH	WEIGHT
1 unit	3'9" (1.15m)	3'9" (1.15m)	7'4" (2.24m)	2,200 lb (1,000kg)

SLED ACCESSORY INFORMATION

PRODUCT	HEIGHT	WIDTH	LENGTH	WEIGHT
SLED 3942	5'5" (0.14m)	3'10" (1.16m)	2' (0.62m)	68 lb (31kg)

TRANSPORT INFORMATION

TYPE	PALLETS	UNITS	DEPLOYED LENGTH
13.5 Trailer	22	22	6,350' (1,936m)
20' Container	10	10	2,885' (880m)
40' Container	20	20	5,774' (1,760m)

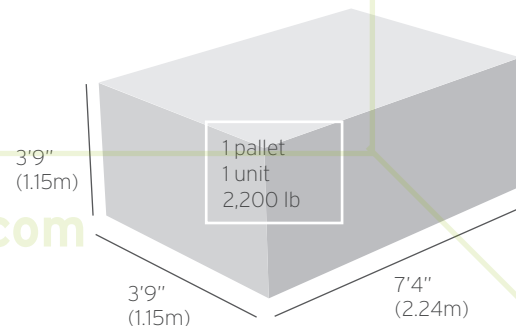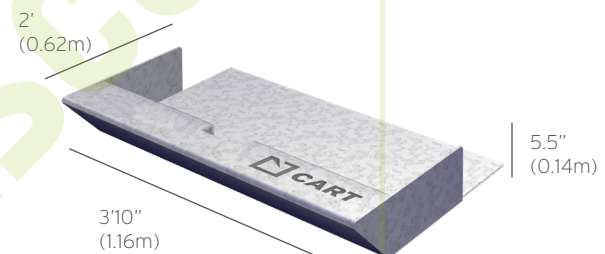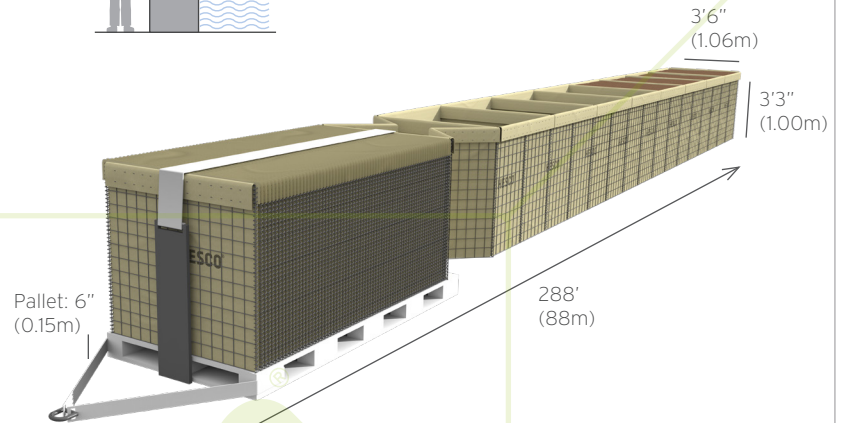

Hesco Group

Unit 41, Knowsthorpe Way,
Leeds LS9 0SW
United Kingdom

Telephone: +44 113 248 6633
Email: support@hesco.com

Disclaimer: The information contained in this document is intended solely to provide general guidance. The right is reserved to make changes to this document without notice at any time. Nothing in this document (i) constitutes an offer, representation, warranty, term or condition or (ii) is a substitute for the need to employ adequate independent technical expertise and judgment.

Patents and Trademarks: HESCO® products are subject to patents and/or patent applications in territories around the world. HESCO® is a registered trademark of Hesco Bastion Ltd and its affiliates ("Hesco") around the world. Other trademarks also apply. For full details, please go to: www.hesco.com/legal_notice

Quality Standards: Hesco operates a quality management system certified to ISO9001:2015. Approved Certificate number: 10147344
This material is subject to copyright protection. Copyright © 2019 Hesco. All rights reserved.