


TECHNICAL SPECIFICATIONS

FLOOD BARRIERS

FLOODLINE™ 4836 UNIT



UNIT	HEIGHT	WIDTH	LENGTH
SL4836 (Beige)	4' (1.22m)	3' (0.91m)	15' (4.57m)
SL4836 (Green)	4' (1.22m)	3' (0.91m)	15' (4.57m)




Geotextile-lined units suitable for a wide range of uses, including the construction of walls and barriers, flood protection, erosion protection, protection against accidental explosions and homeland security applications. STORM LINED units are particularly suitable in flood areas where damage from floating debris may be an issue.

GENERAL SPECIFICATIONS

Geotextile-lined welded mesh barrier coated to ASTM A 856. All wires conform to BS EN 10218-2:2012. Zinc-Aluminum coatings are to BS EN 10244-2:2009, where appropriate. The geotextile is a heavy-duty, non-woven, permeable, polypropylene fabric, available in either beige or green color.

All dimensions and weights are nominal. Diagrams and product images are for illustrative purposes only.

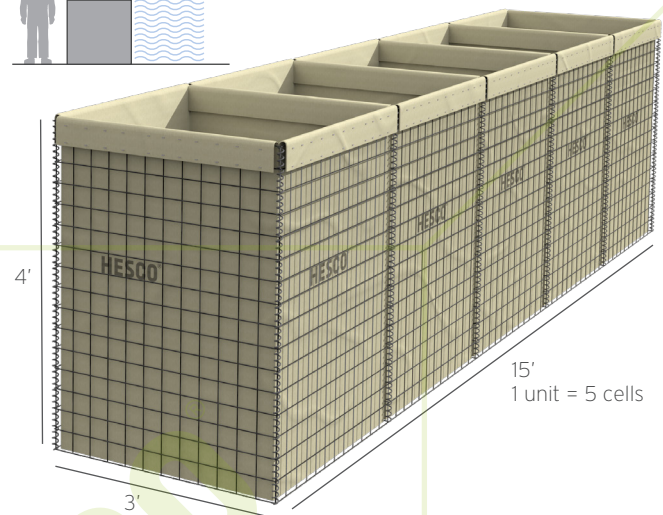

PACKAGING AND TRANSPORT INFORMATION

FLAT-PACKED INDIVIDUAL UNIT DIMENSIONS & WEIGHTS


HEIGHT	WIDTH	LENGTH	WEIGHT
5" (0.13m)	3'6" (1.07m)	4' (1.22m)	136 lb (62kg)

PALLET INFORMATION

PER PALLET	HEIGHT	WIDTH	LENGTH	WEIGHT
10 units	3'10" (1.17m)	3'6" (1.06m)	4'4" (1.32m)	1,396 lb (633kg)

TRANSPORT INFORMATION

TYPE	PALLETS	UNITS	DEPLOYED LENGTH
13.5 Trailer	31	310	4,650' (1,417m)
20' Container	16	160	2,400' (732m)
40' Container	36	360	5,400' (1,646m)

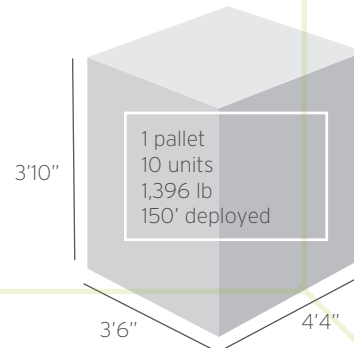

hesco.com

UK and Rest of World Inquiries

Hesco
Unit 41, Knowsthorpe Way,
Leeds LS9 0SW United Kingdom
Telephone: +44 113 248 6633

US and Americas Inquiries

Hesco
1199 North Fairfax Street, Suite 410,
Alexandria, Virginia 22314 United States
Telephone: +1 985-345-7332

Email: support@hesco.com

Disclaimer

The information contained in this document is intended solely to provide general guidance. The right is reserved to make changes to this document without notice at any time. Nothing in this document (i) constitutes an offer, representation, warranty, term or condition or (ii) is a substitute for the need to employ adequate independent technical expertise and judgment.

Patents and Trademarks

HESCO® products are subject to patents and/or patent applications in territories around the world. HESCO® is a registered trademark of Hesco Bastion Ltd and its affiliates ("Hesco") around the world. Other trademarks also apply.

For full details, please go to:
www.hesco.com/legal_notice

Quality Standards

Hesco operates a quality management system certified to ISO 9001:2008.
Approved Certificate number:
ISO9001-00008569

This material is subject to copyright protection.
Copyright © 2018 Hesco.
All rights reserved.

hesco.com